


THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

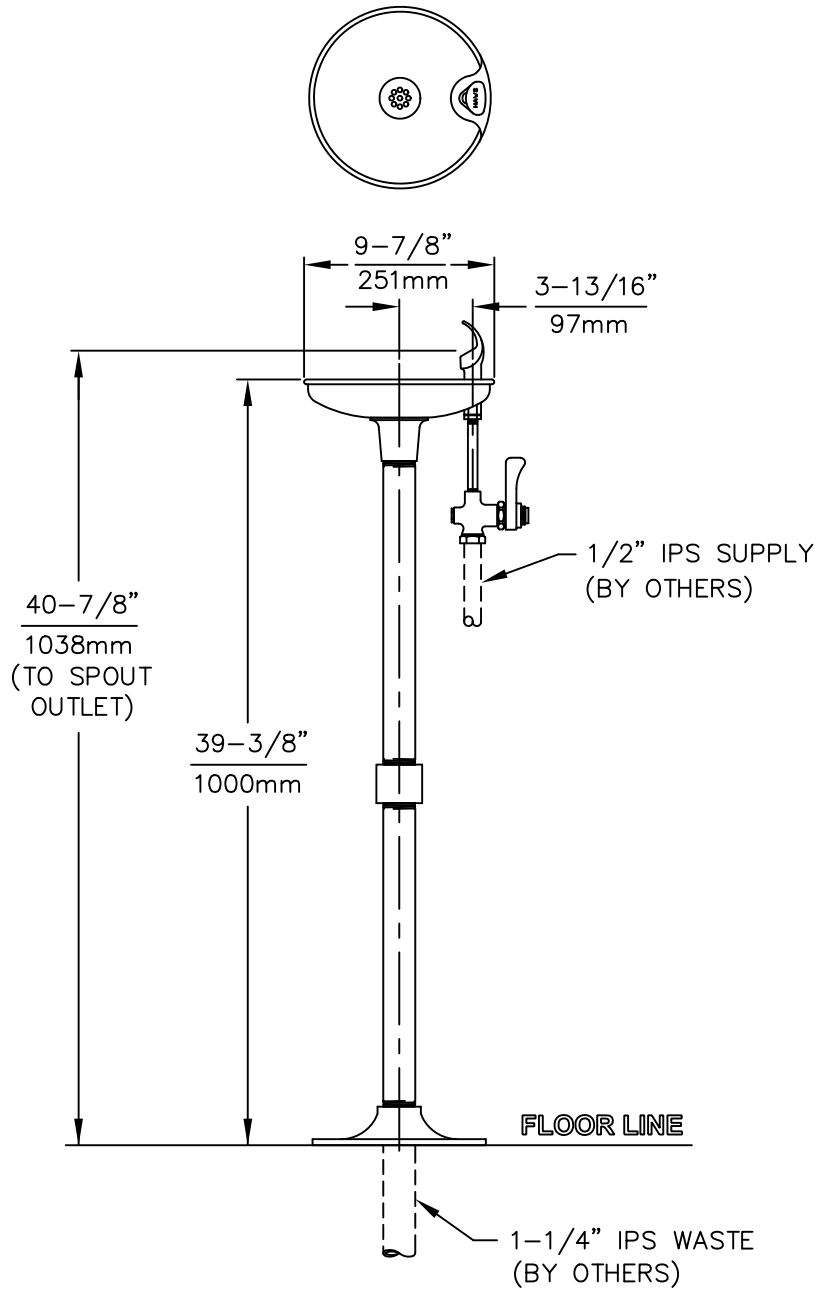

TO ADJUST FLOW, TURN ADJUSTMENT SCREW COUNTER CLOCKWISE TO INCREASE FLOW, AND CLOCKWISE TO DECREASE FLOW.

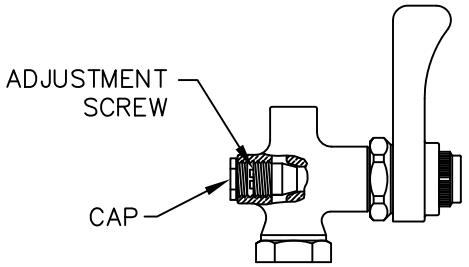

VALVE DETAIL
SCALE: 3X

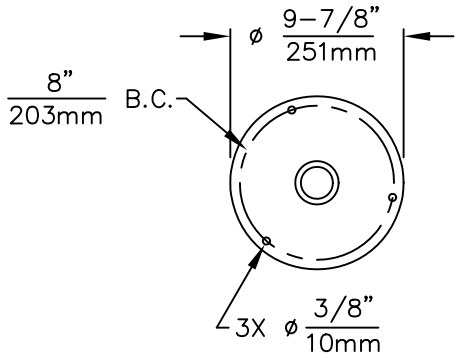

MOUNTING DETAIL

ROUGH–IN DIMENSIONS MAY VARY ±1/4" (6.4mm).

DWG. NO. 10210C00

INFO FAX : 1–888–FAX–HAWS (1–888–329–4297)
1455 Kleppe Ln, Sparks NV, 89431
Phone: 775–359–4712 Fax: 775–359–7424
Haws Ag Bachweg 3 CH–3401 Burgdorf Switzerland
Haws Mfg Pte Ltd 74 Sungei Kadut Loop Singapore 729531
e–mail: Haws@hawsco.com website: www.hawsco.com

ECR NO.	REVISED PER	BY:	MODEL(S):	PART NUMBER:
.	ECN: 3878	HM	3482	0002077446.D
DRAWN:	DATE:	CHK'D.:	INFO FAX DOC #: 23482	DRAWING NUMBER: 10210C00 REV. 11
CJL	06/92		SCALE: 1:10 DRAWING TYPE: INSTALLATION/FAXBACK	SIZE: A SHT. 1 OF 1
APPROVED:	DATE:			

©2006 Haws Corporation - All Rights Reserved HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.