Nuoroda : DI 7240-BUA

Rev. : Pradinis

Data : 02/01/2020

Puslapis : 1/1

FLANŠINĖ GUMINĖ KOMPENSATORINĖ JUNGTIS SU PASUKIMU

DI 7240-BUA

Tecofi VALVE DESIGNER - FRANCE

APRAŠYMAS

Bendroji paskirtis: geriamasis vanduo.



BENDROSIOS SAVYBĖS


Diapazonas nuo DN32 iki DN300.
Sumažina mechaninį ir terminį įtempį.
ant vamzdžių ir pagalbinių sistemų, tokių kaip siurbliai, kompresoriai ir pavaros.
Sugeria vibraciją ir triukšmą. Kompensuoja ašinius, šoninius ir kampinius judesius.
Koreguoja nesutapimus..

KONSTRUKCIJA

4	Flanšas	Cinkuotas plienas
3	Ausis	Kietasis plienas
2	Sustiprinimas	Sintetiniai pluoštai
1	Rankovė	Butilo
Nr.	**Aprašymas**	**Medžiaga**

DIMENSIJOS

DN		BL	Ødi	ØC	ØE	ØW	ØD	b	Lc	Le	Li	A°	Svoris (kg)
mm	coliai												
32	1"1/4	130	31	72	39	88	140	16	35	10	15	25	3,30
40	1"1/2	130	39	81	45	96	150	16	35	10	15	25	3,80
50	2"	130	49	95	56	107	165	16	35	10	15	25	4,50
65	2"1/2	130	65	115	72	123	185	18	35	10	15	25	5,20
80	3"	130	77	127	84	135	200	20	30	10	15	20	7,10
100	4"	130	100	151	109	160	220	20	30	10	15	15	8,00
125	5"	130	127	178	133	184	250	22	30	10	15	15	10,50
150	6"	130	153	206	161	212	285	22	30	10	15	10	12,80
200	8"	130	202	260	209	260	340	25	25	10	15	7	18,20
250	10"	130	252	313	262	313	395	25	25	10	15	6	23,70
300	12"	130	303	363	312	363	445	25	25	10	15	5	30,40

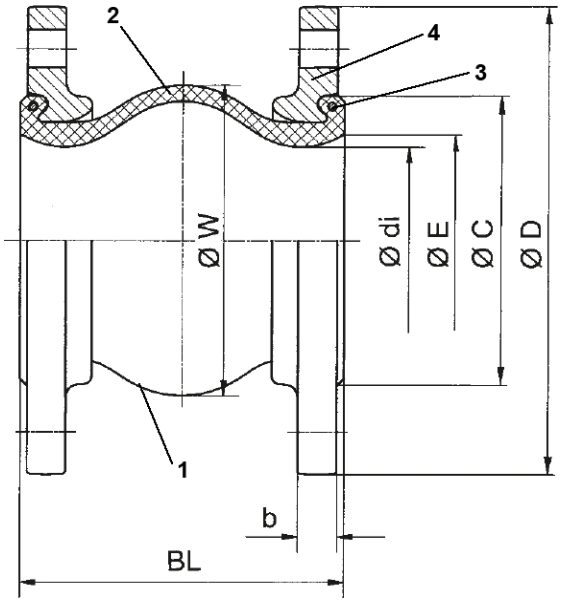


DARBO SĄLYGOS

Didžiausia darbinė temperatūra: 90 °C, esant 6 barams
60 °C, esant 16 barų slėgiui

STANDARTAI

Flanšai pagal EN 1092 PN10/16 iki DN150 ir PN10 nuo DN200 iki DN300.

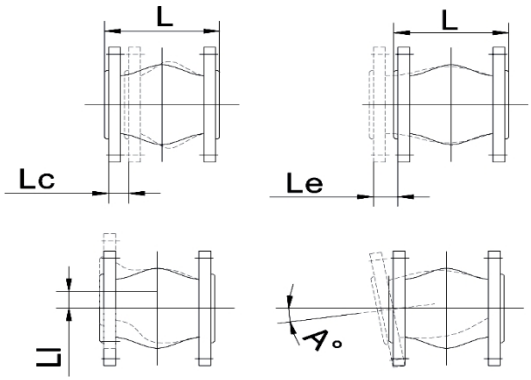

Lc: ašinis suspaudimas
Le: ašinis pailgėjimas
Li : Šoninis judėjimas
A° : kampinis judesys

The photographs and drawings in this document are the property of TECOFI and are not contractual. TECOFI reserves the right to modify the characteristics of its products without prior notice. Please consult us to check that the information in this document is still valid. Reproduction of this document in whole or in part is prohibited without the written consent of TECOFI.