
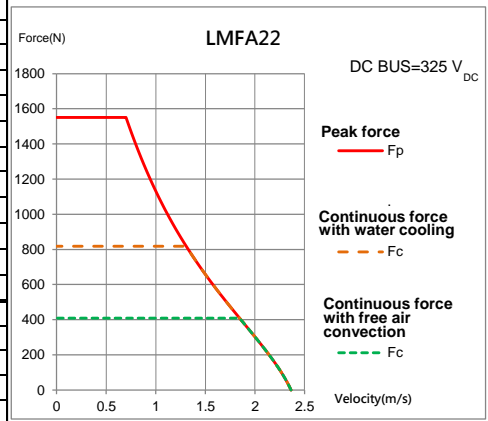
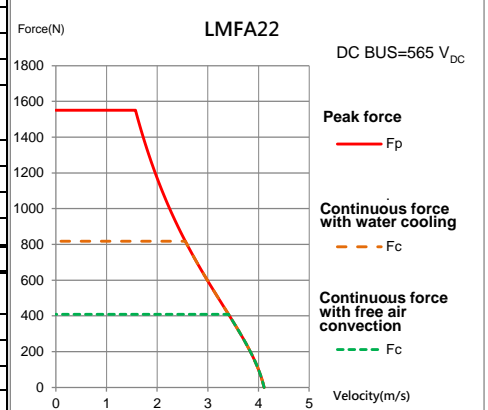


LMFA22


Linear Motor

Electrical specifications				
	Symbol	Unit	Free air convection	Water cooling
Continuous force	F_c	N	409	819
Continuous current	I_c	A_{rms}	2.7	5.4
Stall force	F_0	N	-	573
Stall current	I_0	A_{rms}	-	3.8
Peak force (1s)	F_p	N		1552
Peak current (1s)	I_p	A_{rms}		16.7
Force constant	K_f	N/A_{rms}		151.6
Attraction force	F_a	N		2518
Max. winding temperature	T_{max}	°C		120
Electrical time constant	K_e	ms		7.2
Resistance (line to line · 25°C)	R_{25}	Ω		12.4
Resistance (line to line · 120°C)	R_{120}	Ω		16.4
Inductance (line to line)	L	mH		89.3
Pole pair pitch	2τ	mm		30
Back emf constant(line to line)	K_v	$V_{rms}/(m/s)$		87.5
Motor constant (25°C)	K_m	N/\sqrt{W}		35.2
Thermal resistance	R_{th}	°C/W	0.53	0.13
Thermal time constant	t_{th}	s	-	150
Thermal switch			1 x Pt1000 + 1 x (3 PTC SNM 120 In Series)	
Maximum velocity at maximum force	$V_{MAX,FP}$	m/s		2.21
Maximum electric power input	$P_{EL,MAX}$	W	-	10304
Maximum dissipated heat output	$Q_{P,H,MAX}$	W	-	715
Max. DC bus voltage	V_{DC}	V		750


Mechanical specifications					
	Symbol	Unit	Free air convection	Water cooling	
Mass of forcer	M_f	kg		5.5	
Unit mass of stator	M_s	kg		9.8	
Total installation height	H	mm		50.5	
Minimum flow rate		L/min	-	4	
Temperature of cooling water		°C	-	20	
Pressure drop	ΔP	bar	-	1.83	
Water temperature difference	$\Delta\theta_{P,H}$	K	-	2.6	
L_f	mm	250	$Wf3$	mm	111.5
L_{f1}	mm	157.5	$Wf4$	mm	58
W_f	mm	126	$Wf5$	mm	20
$Wf1$	mm	40.5	N	mm	4
$Wf2$	mm	45	n	mm	-

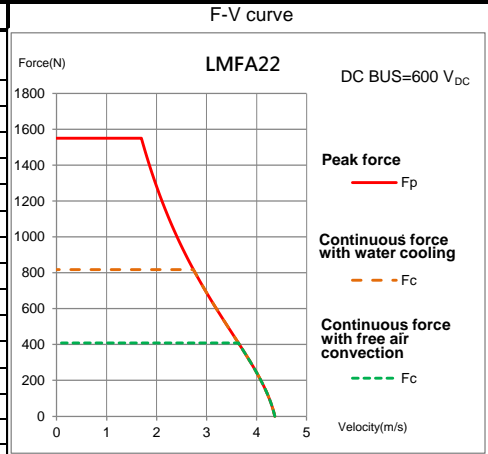


Forcer dimensions

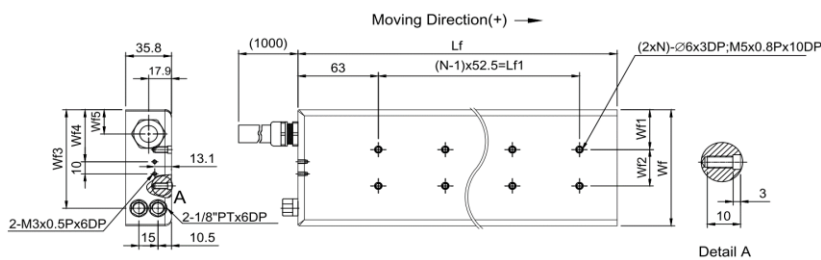

Mounting tolerance

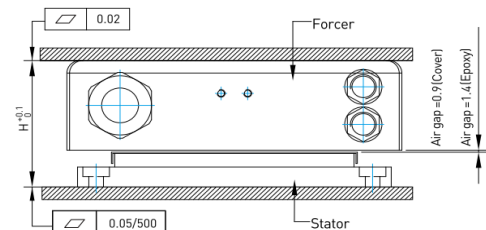

Stator dimensions

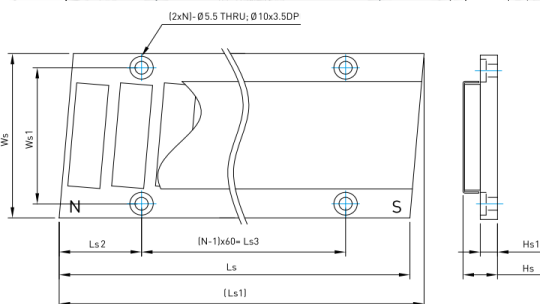

Type	L_s	L_{s1}	L_{s2}	L_{s3}	H_s	H_{s1}	W_s	W_{s1}	N
LMF2S1	120	123.09	30.4	60	13.8	7.9	118	104	2
LMF2S1E	120	123.09	30.4	60	13.3	7.7	118	104	2
LMF2S2	180	183.09	30.4	120	13.8	7.9	118	104	3
LMF2S2E	180	183.09	30.4	120	13.3	7.7	118	104	3
LMF2S3	300	303.09	30.4	240	13.8	7.9	118	104	5
LMF2S3E	300	303.09	30.4	240	13.3	7.7	118	104	5

Except dimensions, all the specifications in the table are in ±10% of tolerance