


IM-2-45-SAO

Electrical specifications

Winding code : SA	Symbol	Unit	Field weakening & Water cooling
Continuous torque	T_c	Nm	148
Continuous current	I_c	A_{rms}	24.9
Stall torque	T_s	Nm	120
Stall current	I_s	A_{rms}	19.9
Peak torque(for 1sec.)	T_p	Nm	281
Peak current(for 1sec.)	I_p	A_{rms}	52
Torque constant	K_t	Nm/A_{rms}	6.41
Electrical time constant	T_e	ms	3
Resistance (line to line at 25°C)	R_{25}	Ω	1.72
Inductance (line to line)	L_d / L_q	mH	5.1 / 7.5
Number of poles	2p		40
Back emf constant (line to line)	K_v	$V_{rms}/rad/s$	3.7
Motor constant (at 25°C)	K_m	Nm/\sqrt{W}	3.93
Thermal resistance	R_{th}	K/W	0.066
Thermal sensor			PTC SNM100+SNM130+Pt1000
Max. DC BUS		V_{DC}	750
Inertia of rotor	J	kgm^2	0.027
Thermal time constant	T_{th}	s	84
Max. continuous power dissipation	P_c	W	2259
Max. peak power dissipation	P_p	W	9856
Max. speed(at 600VDC)		rpm	3000
Based speed(at 600VDC)		rpm	836
Rated speed(at 600VDC)		rpm	3000


T-N curve

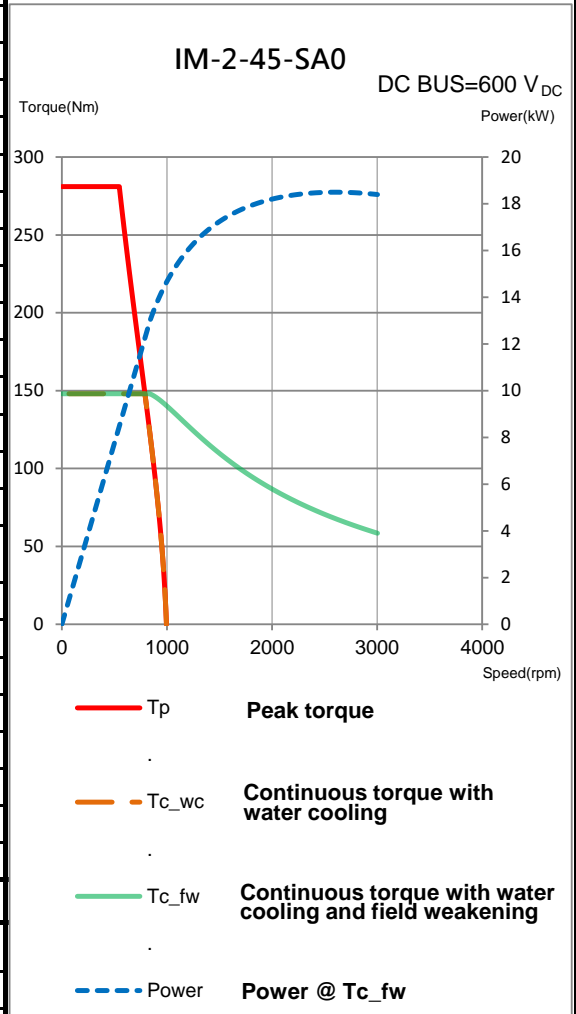

Mechanical specifications

	Symbol	Unit	Field weakening & Water cooling
Mass of rotor	M_r	kg	5.4
Mass of stator	M_s	kg	9
Height of stator	H_s	mm	90
Height of rotor	H_r	mm	78
Length of rotor centring fit	H	mm	17
Water temperature difference for P_c	$\Delta\theta$	K	5
Minimum water flow	q	l/min	6.5
Max. pressure drop	Δp	bar	1

Thermal sensor

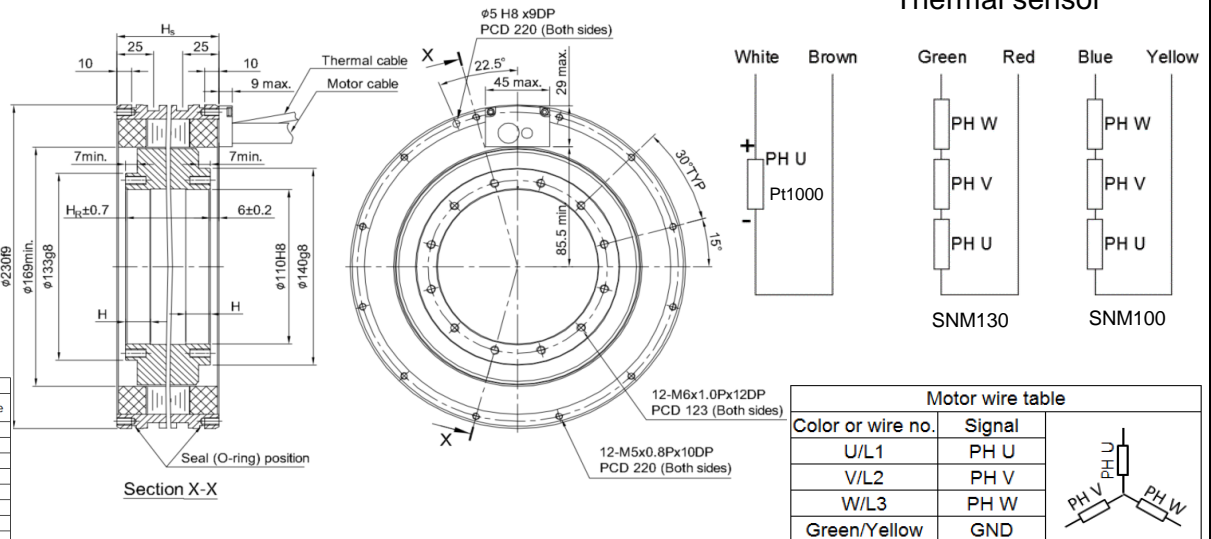

General tolerance mm	
Nominal dimension	Tolerance
~ 6	±0.1
> 6 ~ 30	±0.2
> 30 ~ 120	±0.3
> 120 ~ 300	±0.4
> 300 ~ 600	±0.5
> 600 ~ 1200	±0.8
> 1200 ~ 2400	±1.0
> 2400	±1.5

Except dimensions, all the specifications in the table are in ±10% of tolerance

Version: 2.00

This drawing is only for reference, detail dimensions please refer to approval drawing.

Date: 2020/10/23