

TM-2-1A-SA0 Torque Motor



Electrical specifications

Winding code : SA	Symbol	Unit	Water cooling
Continuous torque	T_c	Nm	90
Continuous current	I_c	A_{rms}	22.3
Stall torque	T_s	Nm	74
Stall current	I_s	A_{rms}	17.8
Peak torque(for 1sec.)	T_p	Nm	150
Peak current(for 1sec.)	I_p	A_{rms}	43.4
Torque constant	K_t	Nm/Arms	4.36
Electrical time constant	T_e	ms	4.9
Resistance (line to line at 25°C)	R_{25}	Ω	2
Inductance (line to line)	L	mH	9.7
Number of poles	2p		22
Back emf constant (line to line)	K_v	Vrms/rad/s	2.52
Motor constant (at 25°C)	K_m	Nm/ \sqrt{W}	2.49
Thermal resistance	R_{th}	K/W	0.07
Thermal sensor			PTC SNM100+SNM130+Pt1000
Max. DC BUS		V_{DC}	750
Inertia of rotor	J	kgm^2	0.0033
Thermal time constant	T_{th}	s	110
Max. continuous power dissipation	P_c	W	2103
Max. peak power dissipation	P_p	W	7967
Rated speed(at 600VDC)		rpm	818


Mechanical specifications

	Symbol	Unit	Water cooling
Mass of rotor	M_r	kg	2.3
Mass of stator	M_s	kg	11.1
Height of stator	H_s	mm	140
Height of rotor	H_r	mm	101
Length of rotor centring fit	H	mm	15
Water temperature difference for P_c	$\Delta\theta$	K	5
Minimum water flow	q	l/min	6.1
Max. pressure drop	Δp	bar	1

T-N curve

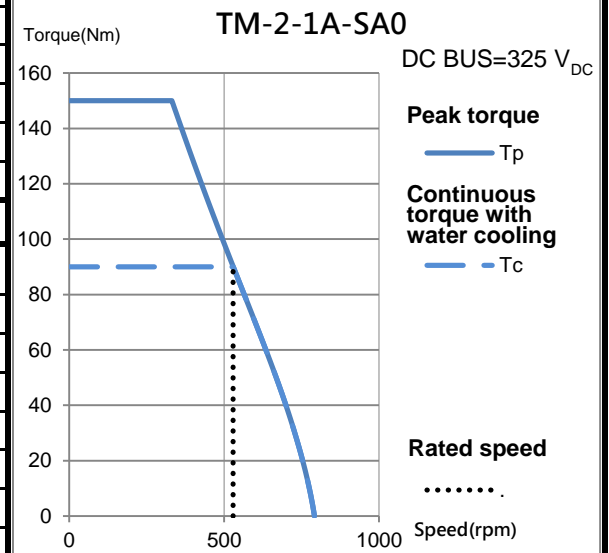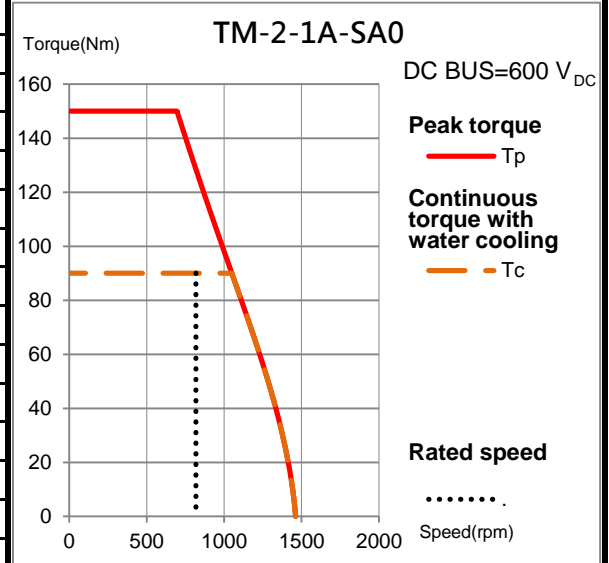

Thermal sensor

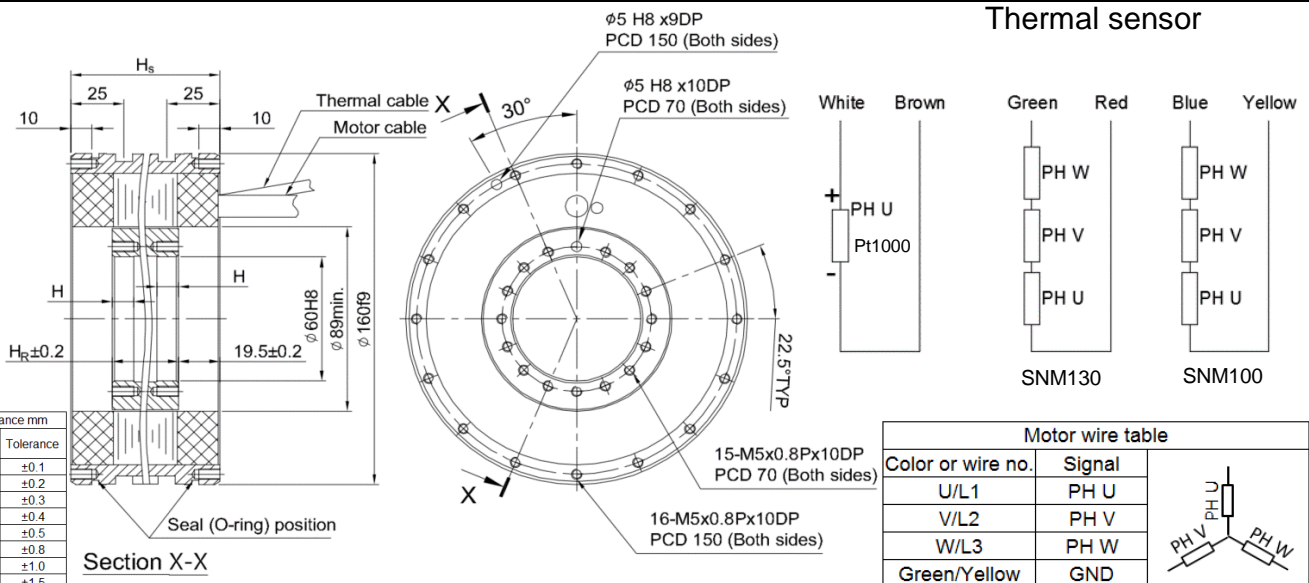

Except dimensions, all the specifications in the table are in $\pm 10\%$ of tolerance

Version: 2.00

This drawing is only for reference, detail dimensions please refer to approval drawing.

Date: 2020/10/23