

# TM-2-27-PB0 Torque Motor



## Electrical specifications

Winding code : PB	Symbol	Unit	Water cooling
Continuous torque	$T_c$	Nm	116
Continuous current	$I_c$	$A_{rms}$	20.4
Stall torque	$T_s$	Nm	95
Stall current	$I_s$	$A_{rms}$	16.3
Peak torque(for 1sec.)	$T_p$	Nm	224
Peak current(for 1sec.)	$I_p$	$A_{rms}$	51
Torque constant	$K_t$	Nm/Arms	5.89
Electrical time constant	$T_e$	ms	7.3
Resistance (line to line at 25°C)	$R_{25}$	$\Omega$	1.7
Inductance (line to line)	L	mH	12.4
Number of poles	2p		22
Back emf constant (line to line)	$K_v$	Vrms/rad/s	3.4
Motor constant (at 25°C)	$K_m$	Nm/ $\sqrt{W}$	3.65
Thermal resistance	$R_{th}$	K/W	0.099
Thermal sensor			PTC SNM100+SNM130+Pt1000
Max. DC BUS		$V_{DC}$	750
Inertia of rotor	J	$kgm^2$	0.0023
Thermal time constant	$T_{th}$	s	150
Max. continuous power dissipation	$P_c$	W	1498
Max. peak power dissipation	$P_p$	W	9363
Rated speed(at 600VDC)		rpm	818


## Mechanical specifications

	Symbol	Unit	Water cooling
Mass of rotor	$M_r$	kg	2.3
Mass of stator	$M_s$	kg	12
Height of stator	$H_s$	mm	120
Height of rotor	$H_r$	mm	71
Length of rotor centring fit	H	mm	15
Water temperature difference for $P_c$	$\Delta\theta$	K	5
Minimum water flow	q	l/min	4.3
Max. pressure drop	$\Delta p$	bar	1

## T-N curve

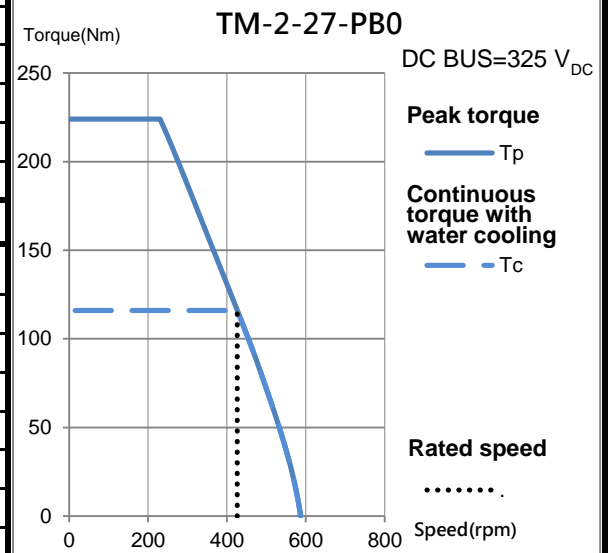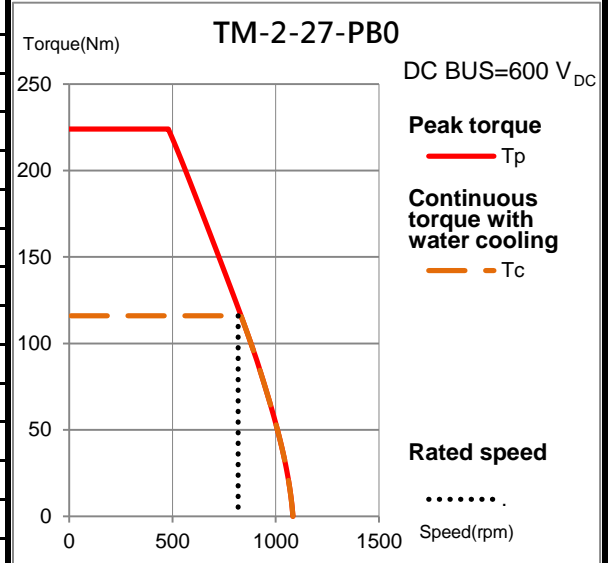

## Thermal sensor

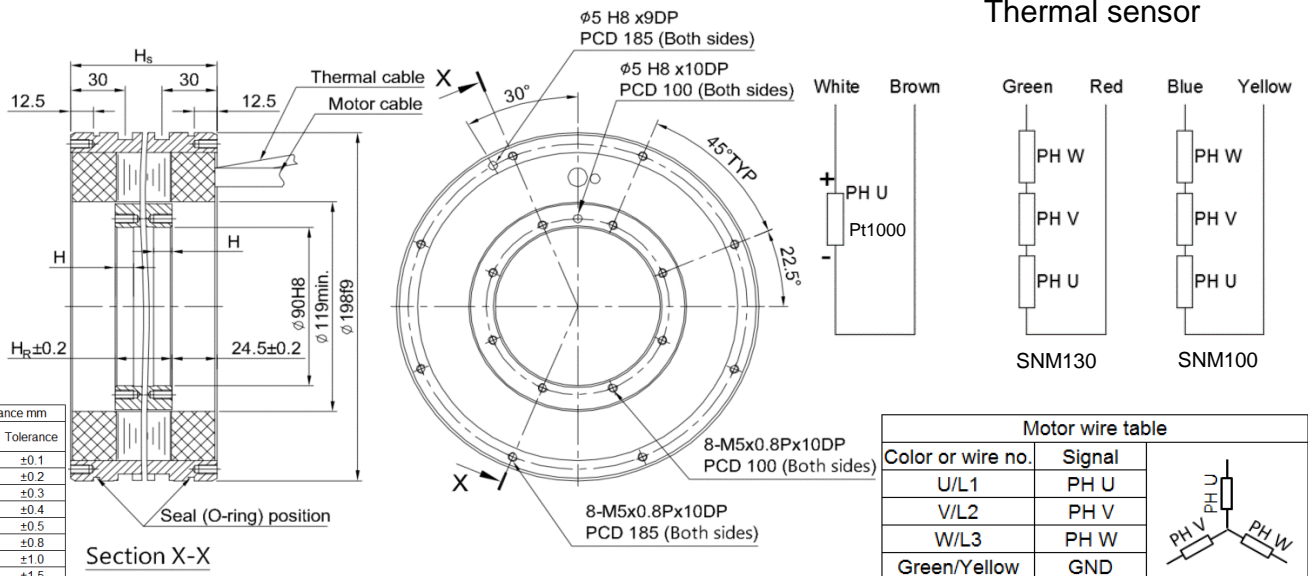

Motor wire table	
Color or wire no.	Signal
U/L1	PH U
V/L2	PH V
W/L3	PH W
Green/Yellow	GND

Except dimensions, all the specifications in the table are in  $\pm 10\%$  of tolerance

Version: 2.00

This drawing is only for reference, detail dimensions please refer to approval drawing.

Date: 2020/10/23